




DYNAMIC TAIL LIGHT INSTALL GUIDE



DYNAMIC TAIL LIGHT INSTALL GUIDE



This installation guide is suitable for the turn signal on the tail light assembly.

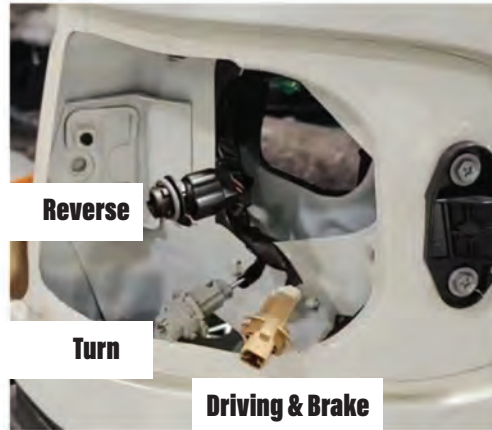


Remove the original lamps, and remove the three bulbs.



Insert the harness socket of the retrofit light into the socket (no need to distinguish between positive and negative).




Pay attention to the reverse lights. (The white line on the light body corresponds to the red and yellow two-color line on the car body).

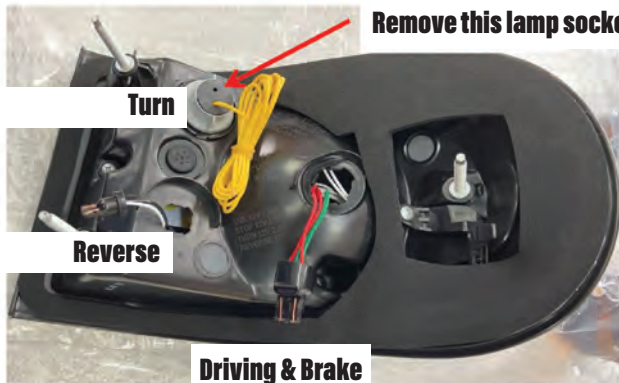

Remove this lamp socket

The yellow line is the turn signal line, you need to remove the lamp socket, this socket is not required.

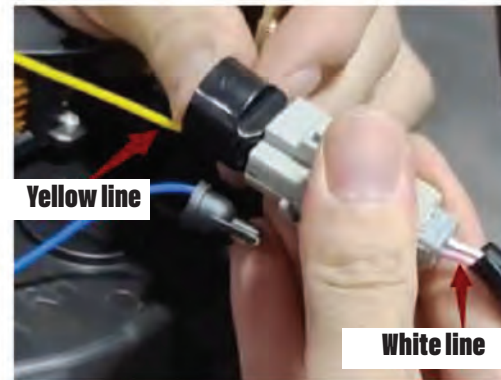

The single yellow line of the turn signal is connected to the power of the body lamp socket line to line.

After the installation is complete, test whether the functions are normal.